
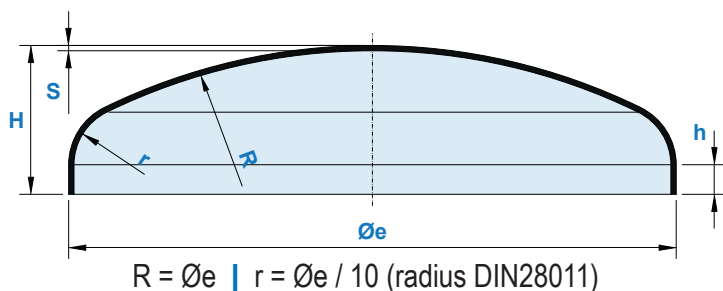


# DISHED HEADS FOR PIPES | TYPE D

Øe mm	H mm	R mm	r mm	h* mm	S mm	V* mm	P** kg/mm
33	15	33	3	7	3	0.006	0.013
42	18	42	4.2	8	3	0.005	0.02
60	24	60	6	11	1.5 - 3	0.04	0.04
70	30	70	7	15	3	0.07	0.06
76	25	76	7.6	9	2 - 3	0.07	0.06
89	30	89	8.9	11	1.5 - 3	0.12	0.8
102	32	102	10.2	11	3	0.17	0.1
108	36	108	10.8	13	3	0.22	0.12
133	42	133	13.3	9	2 - 4	0.39	0.18
133	52	133	13.3	19	5	0.52	0.21
139	45	139	13.9	16	2 - 5	0.46	0.2
154	52	154	15.4	21	2 - 5	0.68	0.26
159	48	159	15.9	16	2 - 3	0.64	0.25
159	58	159	15.9	26	3 - 5	0.83	0.29
168	58	168	16.8	23	1.5 - 3	0.89	0.31
168	57	168	16.8	23	3 - 5	0.89	0.31
194	70	194	19.4	31	3 - 4	1.52	0.43
200	65	200	20	25	2 - 3	1.45	0.42
220	75	220	22	26	3 - 5	1.9	0.5
240	70	240	24	22	2.5	2.22	0.57
244	85	244	24.4	36	2 - 3	2.94	0.66
250	70	250	25	20	3 - 4	2.38	0.6
273	80	273	27.3	26	3 - 5	3.32	0.74

## TYPES OF ACHIEVABLE EDGES

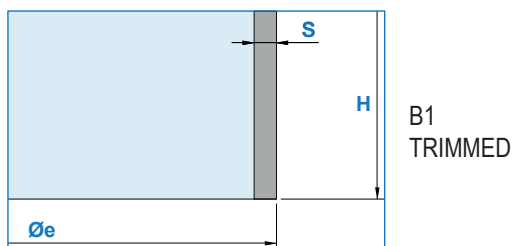

\* the dimension h and the capacity V have been calculated for trimmed dished heads with S = 3mm | \*\*the theoretical weight indicated is to be multiplied by the thickness in mm



**Zapè srl**

Via del Perlar 98 • 37135 Verona VR • Italy

w. [www.zape.it](http://www.zape.it) • t. +39 045 500855 • e. [info@zape.it](mailto:info@zape.it)